


Wall-mount Fiber Patch Box

Feature	Application	 GPX10W1
<ul style="list-style-type: none"> ● Double door opening with anti-theft lock for easy installation and maintenance ● Wall mounting method ● Can meet 12, 24, 48 core fiber connection <p>The panel is fixed with a buckle, easy to disassemble and install, and secure to fix</p>	<ul style="list-style-type: none"> ● Optical communication system ● FTTH ● Wide Area Network ● Local area network ● Cable TV network 	



GPX10W1

- The panel is made of cold-rolled steel
Surface electrostatic spraying
- The welding wiring of the box body adopts separated structure
- Reliable cable fixing, stripping protection device
- Six Φ 35mm optical cable access holes for easy installation and maintenance



Adapter panel

- The adapter panel is made of cold-rolled steel
- Various adapters such as FC, SC, ST, LC (SC type) and DIN (FC type) can be installed according to the interface type



Splice Tray

- Splice tray is made of molded plastic
- Layered structure, easy to operate
- The capacity of splice tray for 12 fibers
- Maximum capacity up to 24 cores




Winding wheel

- Winding wheel can be semicircle
- and rounding two ways of use
- small and simple

Specification

ITEM	CHARACTERISTICS
Operation Temperature	-25° C~+40° C
Storage Temperature	-25° C~+40° C
Relative Humidity	≤85% (+30° C)
Air Pressure	70kPa~106kPa

Drawing

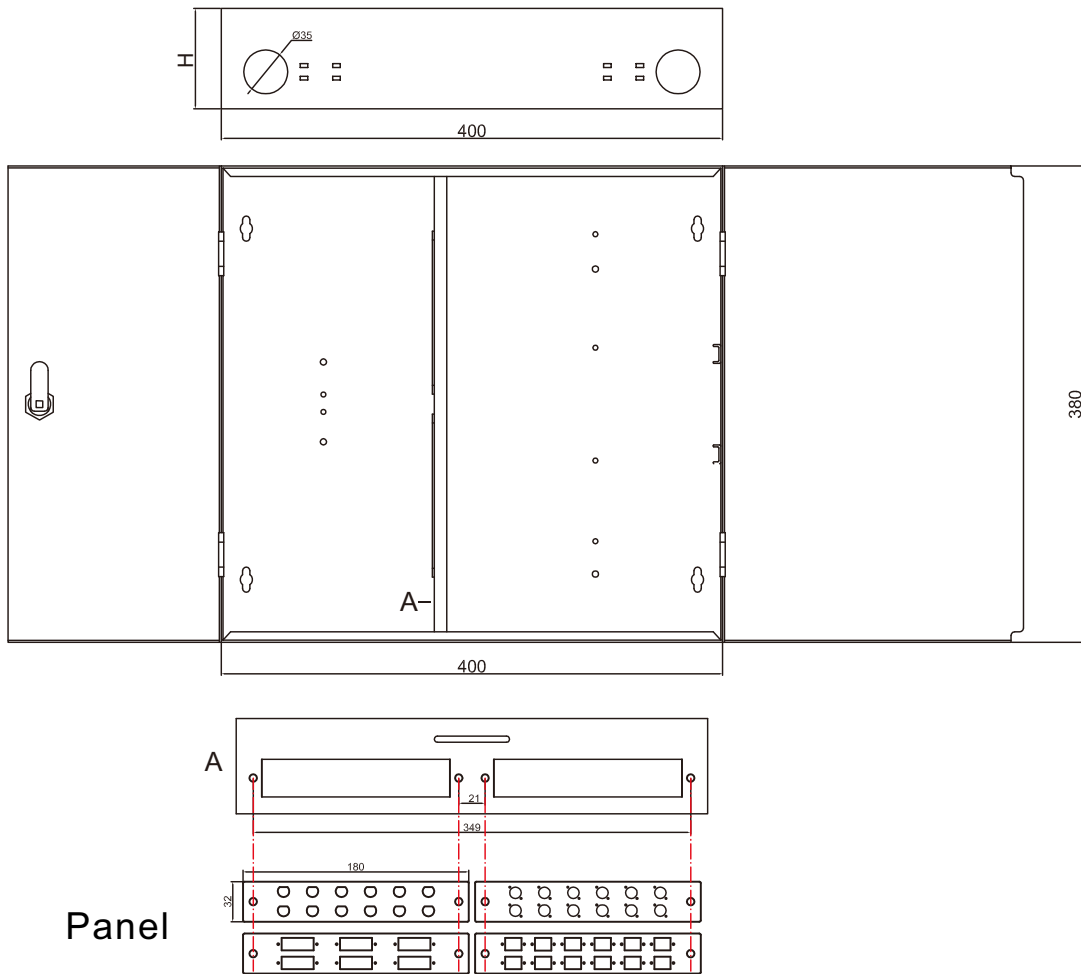

Panel


Parameter

Model	Dimension (LxWxH)	Capacity
GPX10W1-12	400mm×380mm×80mm	12 fiber
GPX10W1-24	400mm×380mm×80mm	24 fiber
GPX10W1-48	400mm×380mm×120mm	48 fiber

Accessories

1	Heat shrinkable tube	---
2	Nylon Locking Tie Wraps	4PCS
3	M6 Rack-Screw	4PCS

Notice: “---” the number is same to fiber cord number

 All product outward appearance, the color take the material object as, the picture only supply the reference.