



MPO12 APC MMF Cables Datasheet

Applicable to Infiniband and Ethernet network architecture cabling



Standards Compliance

- YD/T1272.5-2019
- IEC 61300-3-35
- RoHS and REACH

Features

- Polish Type: APC
- Low loss Connector
- OM3, OM4 available
- Factory Pre-terminated 100% Tested
- Support InfiniBand, Ethernet network

Technical Specification


ITEM	Description
Fiber Count	8 Fibers
Fiber Mode	OM3: Length ≤ 30m OM4: Length > 30m
Connector Type	MPO Female
Polish Type	APC
Cable Jacket Ratings	PVC(OFNR)/LSZH
Connectors Color	Green
Cable Jackets Color	Aqua(OM3); Violet(OM4)
Cable Diameter	3.0mm
Polarity	Type B

ITEM	Description
Insertion Loss	MM:APC≤0.35dB
Return Loss	MM:APC≥25dB
Wavelength	850/1300nm
Operating Temperature	-20~70°C
Storage Temperature	-40~70°C

Polarity: Type B

A		B
Pin No.	Connection	Pin No.
1	----->	12
2	----->	11
3	----->	10
4	----->	9
5	Not used	8
6	Not used	7
7	Not used	6
8	Not used	5
9	<-----	4
10	<-----	3
11	<-----	2
12	<-----	1

Technical Drawing

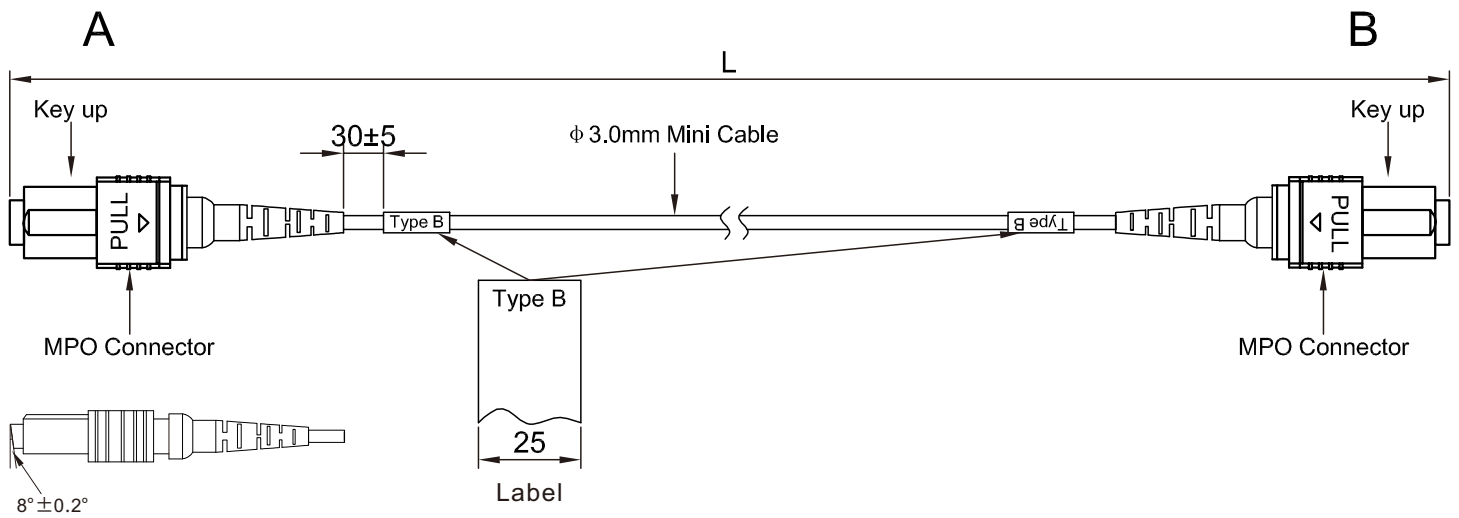

Cable Length	Tolerances
$L \leq 1m$	+150mm/-0
$1m < L \leq 30m$	+150mm/-50
$L > 30m$	+1%/-0

Ordering Information

MPO/F/APC - MPO/F/APC - OM3 - 8B - S - 3M - LSZH - Aqua - B								
1	2	3	4	5	6	7	8	9

- 1-Connector A: MPO/F/APC:MPO Female APC;
- 2-Connector B: MPO/F/APC:MPO Female APC;
- 3-Fiber Type: OM3; OM4;
- 4-Fiber Count: 8B:8F Bundled Cable;
- 5-Breakout Type: S:No Breakout;
- 6-Cable Length: 3M;5M;7M;10M;15M;20M;
- 7-Cable Jacket Ratings: LSZH; PVC(OFNR);
- 8-Cable Color: Aqua(OM3);Violet(OM4);
- 9-Polarity: B: Type B;



SHKE Communication Tech Co.,Ltd.

Add: 3/F, Building 1, Future Science Park,
No.1026 Songbai Road, Xili, Nanshan District
Shenzhen 518055 China

E-mail: market@shke.com.cn

Web: www.shke.com.cn

Copyright ©202602 SHKE Communication Tech Co.,Ltd All Rights Reserved.